

CG30x2+

PRODRY2+ STACK DRYING TUMBLER


ARCHITECTURAL/MECHANICAL
PRODUCT SPECIFICATIONS

ProDry2+


Inverter Drive

Capacity <i>lbs</i>	2 x 30
Cylinder Diameter <i>inch</i>	30
Cylinder Depth <i>inch</i>	26
Cylinder Volume <i>cu ft</i>	10.6
Net Weight <i>lbs</i>	580
Crated Weight <i>lbs</i>	745
Machine Width <i>inch</i>	31.5
Machine Depth <i>inch</i>	43.6
Machine Height <i>inch</i>	76.3
Door Openings <i>inch</i>	22.7
Floor to Door <i>inch</i>	48.3 (top)
Shipping Dimensions <i>inch</i> WxDxH	32.5 x 47 x 80
Exhaust Diameter <i>inch</i>	8
Exhaust Air Flow <i>cfm</i>	400 per pocket
Exhaust Back Pressure (max) <i>WCI</i>	0.90 both pockets
Required Makeup Air <i>sq in</i>	220 both pockets
Electric Heating <i>kW</i>	21
Gas Connection <i>inch</i>	1/2 NPT
Gas Heating <i>BTU/h</i>	73,000 per pocket
Gas Pressure (max/recommended/min) Natural Gas <i>wc</i> Propane <i>wc</i>	10.5 / 6.5 / 5 13 / 11 / 10


SIDE VIEW

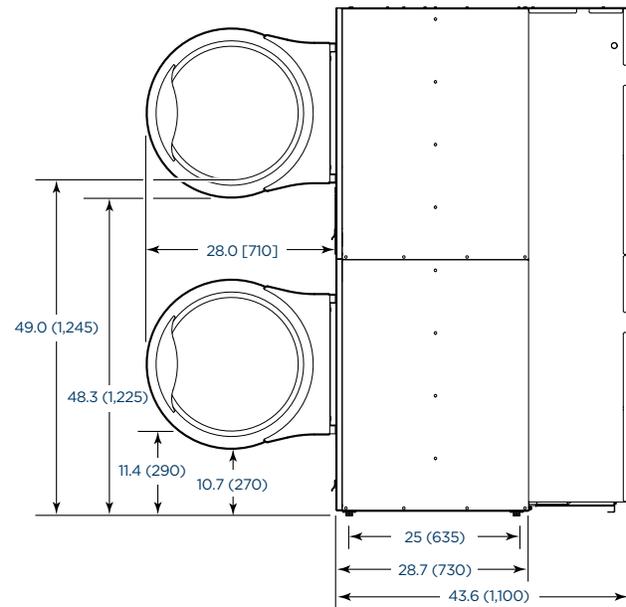

BACK VIEW

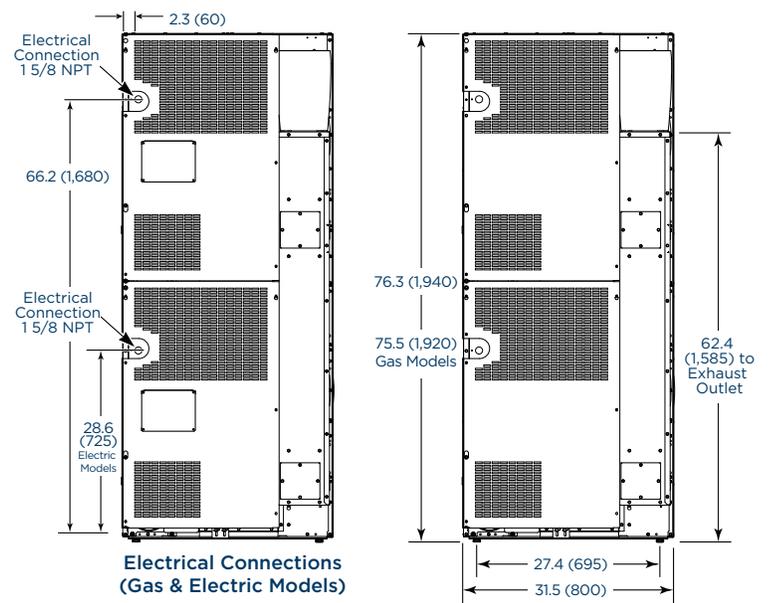

TOP VIEW

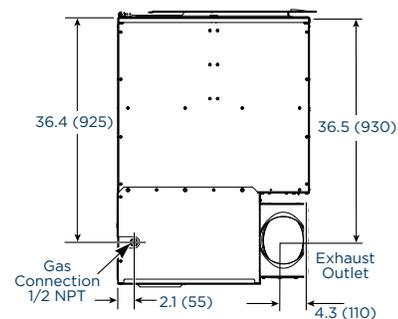

* Specifications subject to change without notice or obligation. Contact Continental Girbau at (800) 256-1073 for dimensions not shown or for clarification.