


Revised 2018 (Starting Serial #1804)

PRODUCT SPECS	<u> </u>		
Capacity <i>lbs</i>	up to 175		
Cylinder Diameter inch	50.75		
Cylinder Depth inch	42.5		
Cylinder Volume cu ft	49.8		
Net Weight <i>lbs</i> Gas Steam	1400 1550		
Crated Weight <i>lbs</i> Gas Steam	1670 1820		
Machine Width inch	53.12		
Machine Depth inch	68.85		
Machine Height <i>inch</i>	94		
Door Opening inch	26.89		
Floor to Door inch	33.86		
Shipping Dimensions <i>inch</i> WxDxH	55.63 x 73.75 x 99		
Exhaust Diameter inch	12		
Exhaust Air Flow cfm	2450		
Exhaust Back Pressure (max) WCI	0.8		
Required Makeup Air sq in	525		
Gas Connection inch	1 NPT		
Gas Heating <i>BTU/h</i>	395,000		
Gas Pressure (max/recommended/min) Natural Gas <i>wc</i> Propane <i>wc</i>	10.5 / 6.5 / 5 13 / 11 / 10		
Steam Connection inch	3/4 NPT		
Condensate Outlet Connection inch	1 NPT		
Steam Heating BTU/h at 100 PSI	648,000		
BHP Consumption BHP at 100 PSI	18.8		

GAS/STEAM MODELS			
AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
200-240/50-60/3	3W+G	11	15
380-415/50-60/3	3W+G	7	15
440-480/50-60/3	3W+G	6	15

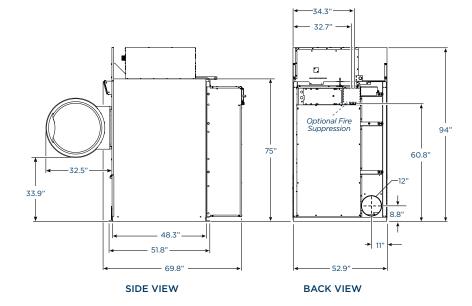









^{*} Specifications subject to change without notice or obligation. Contact Girbau Industrial at (800) 256-1073 for dimensions not shown or for clarification.