

FR+


FLATWORK FOLDER

ARCHITECTURAL/MECHANICAL PRODUCT SPECIFICATIONS


PRODUCT SPECS

Usable Feed Width <i>inch</i>	118 130 138
Feed Height <i>inch</i>	36+
Conveyor Speed <i>ft/min</i>	up to 164
Net Weight <i>lbs</i>	4,400 to 5,500
AP1+ Single Stacker Net Weight <i>lbs</i>	606
AP2+ Dual Stacker Net Weight <i>lbs</i>	1,212
AP3+ Triple Stacker Net Weight <i>lbs</i>	1,815
Rotary Receiver Weight <i>lbs</i>	1,815
Crated Weight (including AP1+)* <i>lbs</i>	6,500
Machine Width (w/AP1+) <i>inch</i>	157.87
Machine Width (w/AP2+) <i>inch</i>	199.60
Machine Width (w/AP3+) <i>inch</i>	229.92
Machine Depth <i>inch</i>	111.61
Machine Height <i>inch</i>	112.4
Shipping Dimensions (WxDxH) <i>inch</i>	193 x 88.5 x 85
Electrical Power <i>kVA</i>	5.7
Available Voltages / Wire Conductor / Amp	208-240/60/3, 12 x 3 + GND, 20 Amp
Electric	440-480/60/3, 12 x 3 + GND, 15 Amp
Compressed Air Connection <i>inch</i>	1/2 NPT
Compressed Air Flow <i>cfm</i>	10 @ 87-145 PSI


* Crated weight will vary on models AP2+ & AP3+ due to multiple shipments.

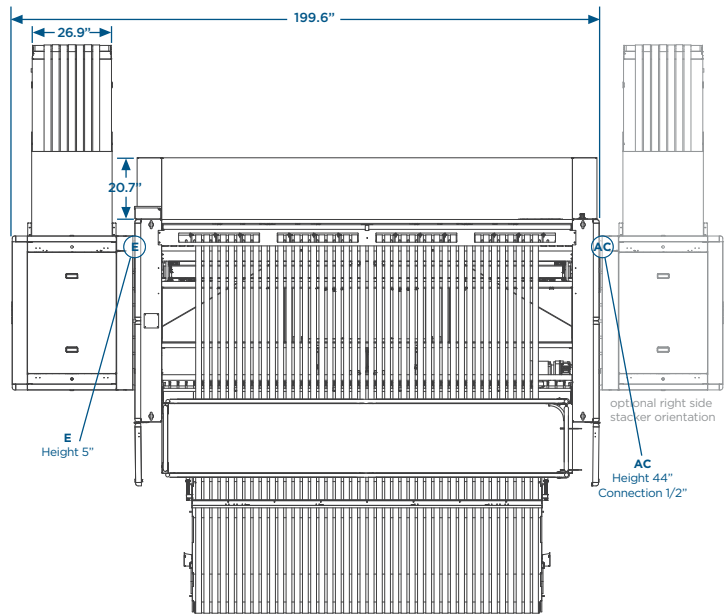

FRB + APB1

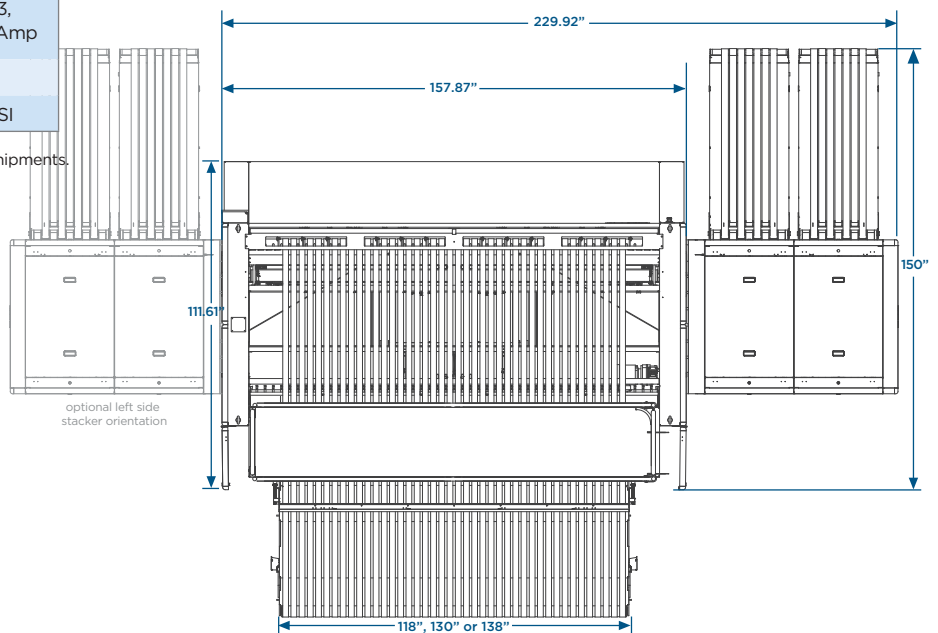

FRB + APB2

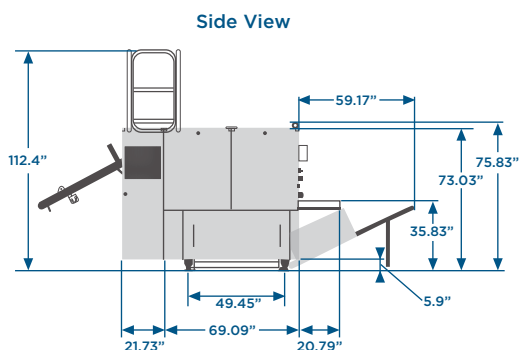

Side View

* Specifications subject to change without notice or obligation. Contact Girbau Industrial at (800) 256-1073 for dimensions not shown, for clarification or for full system dimensions.