

PC120





INDUSTRIAL IRONER | 1 ROLL - GAS

ARCHITECTURAL/MECHANICAL PRODUCT SPECIFICATIONS

PRODUCT SPECS	PC120/1G
Number of Rolls	1
Roll Diameter <i>inch</i>	48
Cylinder Length <i>inch</i>	118 / 130 / 138
Ironing Speed <i>ft/min</i>	16-164
Heating Surface <i>sq ft</i>	118.1
Maximum Heating Power <i>BTU/h</i>	853,035
Evaporation Capacity <i>cfm</i>	0.14
Average Gas Consumption <i>BTU/h</i>	511,821
Gas Connection (natural gas) <i>inch</i>	3/4 NPT
Gas Pressure (natural gas) <i>wc</i>	41 - 120
Gas Flow (natural gas) <i>cfm</i>	15.6
Gas Connection (LP gas) <i>inch</i>	3/4 NPT
Gas Pressure (LP gas) <i>wc</i>	41 - 120
Gas Flow (LP gas) <i>lbs/h</i>	43
Number of Exhaust Connections	2
Ironer Exhaust Diameter <i>inch</i>	10
Ironer Exhaust Flow <i>cfm</i>	971
Ironer Exhaust Back Pressure (max) <i>inch</i>	4 WC
Burner Exhaust Diameter <i>inch</i>	8
Burner Exhaust Flow <i>cfm</i>	380
Burner Exhaust Back Pressure (max) <i>inch</i>	-0.02 WC
Electrical Power (all motors) <i>KVA</i>	17.75
Available Voltages, Wire Conductor, Amp	
Electric	208-240/60/3, 3W + G, 80
Electric	440-480/60/3, 3W + G, 40
Compressed Air Connection <i>inch</i>	1/2
Compressed Air Flow <i>cfm</i>	49 @ 87-94 PSI
Net Weight <i>lb</i>	9,943 / 11,089 / 11,850
Crated Weight <i>lb</i>	11,861 / 13,140 / 13,900
Machine Width <i>inch</i>	174 / 186 / 194
Machine Depth <i>inch</i>	123 - 135*
Machine Height <i>inch</i>	108 - 113**
Crated Roll Width <i>inch</i>	181 / 201 / 201
Crated Roll Depth <i>inch</i>	88
Crated Roll Height <i>inch</i>	90.6

* Depends on small piece tray.

** Depends if handrail is used.

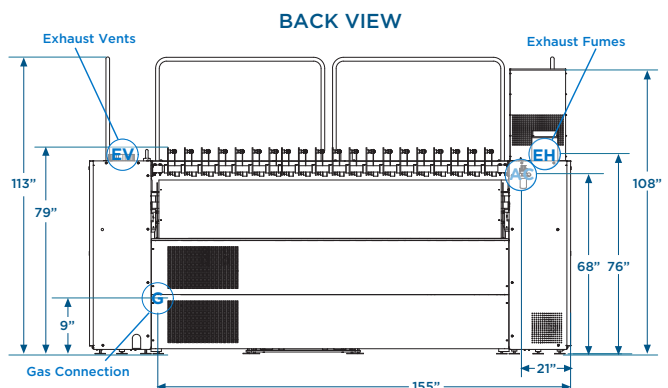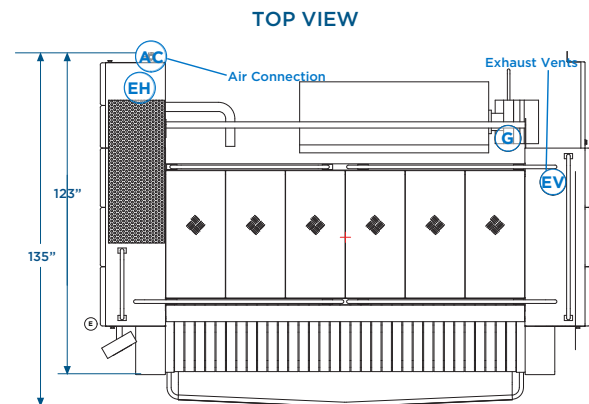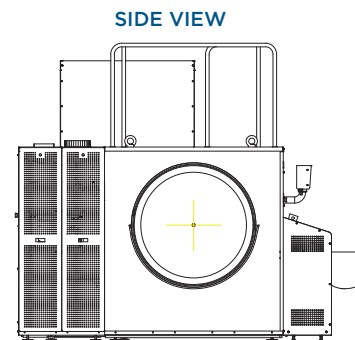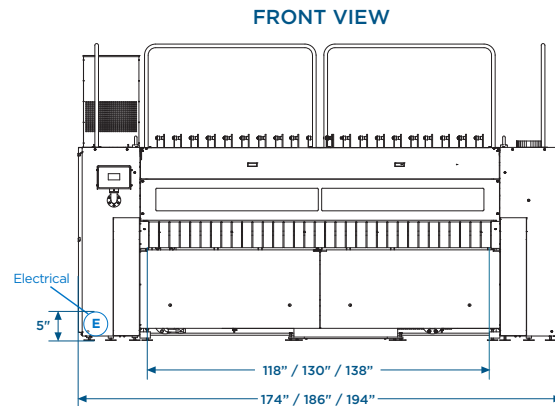

Specifications subject to change without notice or obligation. Contact Girbau Industrial at (800) 256-1073 for dimensions not shown or for clarification.