

PC120

INDUSTRIAL IRONER | 1 ROLL - STEAM


ARCHITECTURAL/MECHANICAL PRODUCT SPECIFICATIONS

PRODUCT SPECS	PC12030	PC12033	PC12035
Number of Rolls	1		
Roll Diameter <i>inch</i>	48		
Cylinder Length <i>inch</i>	118	130	138
Ironing Speed <i>ft/min</i>	16 - 164		
Heating Surface <i>sq ft</i>	63.2	65.9	69.9
Maximum Heating Power <i>BTU/h</i>	791,617	870,096	921,278
Evaporation Capacity <i>cfm</i>	0.14	0.15	0.16
Steam Connection <i>inch</i>	2		
Steam Consumption <i>lbs/h</i>	933	1,025	1,087
Steam Pressure <i>PSI</i>	116 - 174		
Condensate Return <i>inch</i>	1 1/2		
Number of Exhaust Connections	1		
Ironer Exhaust Diameter <i>inch</i>	10		
Ironer Exhaust Flow <i>cfm</i>	971		
Ironer Exhaust Back Pressure (max) <i>inch wc</i>	4		
Electrical Power (all motors) <i>KVA</i>	13.2		
Available Voltages, Wire Conductor, Amp	Electric Electric		
Compressed Air Connection <i>inch</i>	1/2		
Compressed Air Flow <i>cfm</i>	6		
Compressed Air Pressure <i>PSI</i>	87 - 94		
Net Weight Total <i>lb</i>	10,803	12,081	12,820
Net Weight First Roll <i>lb</i>	10,803	12,081	12,820
Crated Weight Total <i>lb</i>	12,721	14,132	14,870
Crated Weight First Roll <i>lb</i>	12,721	14,132	14,870
Machine Width <i>inch</i>	174.1	186.6	193.7
Machine Depth <i>inch</i>	97.2 - 109.5*		
Machine Height <i>inch</i>	73.2 - 112.2**		
Crated Roll Width <i>inch</i>	181	201	201
Crated Roll Depth <i>inch</i>	88		
Crated Roll Height <i>inch</i>	90.6		


* Depends on small piece tray.

** Depends if handrail is used.


FRONT VIEW

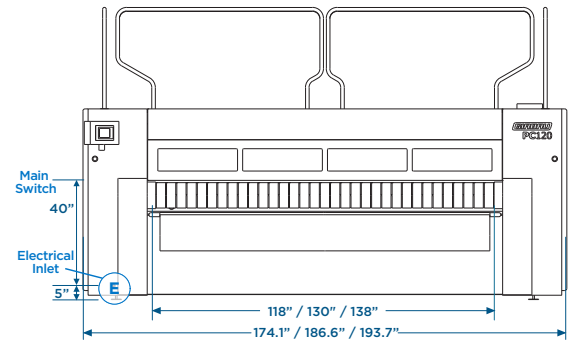


SIDE VIEW



TOP VIEW

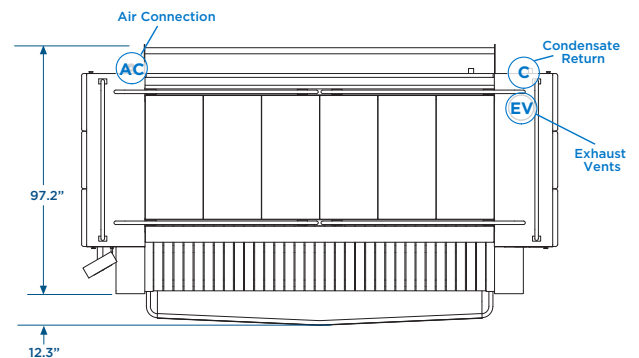

BACK VIEW

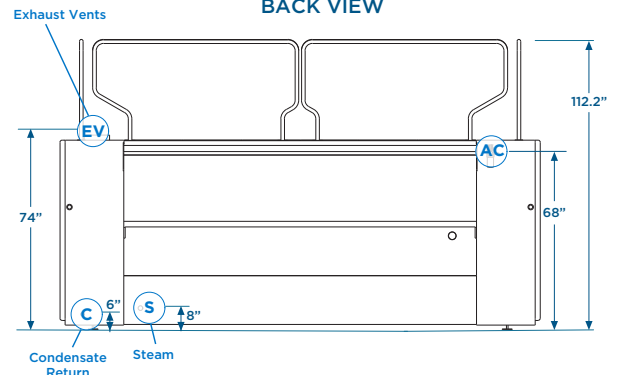

Specifications subject to change without notice or obligation. Contact Girbau Industrial at (800) 256-1073 for dimensions not shown or for clarification.