


PRODUCT SPECS	PC12030	PC12033	PC12035
Number of Rolls	3		
Roll Diameter <i>inch</i>	48		
Cylinder Length <i>inch</i>	118	130	138
Ironing Speed <i>ft/min</i>	16 - 164		
Heating Surface <i>sq ft</i>	219.7	241.5	256.4
Maximum Heating Power <i>BTU/h</i>	1,859,617	2,047,285	2,170,122
Evaporation Capacity <i>cfm</i>	0.33	0.37	0.39
Steam Connection <i>inch</i>	2		
Steam Consumption <i>lbs/h</i>	2,194	2,416	2,562
Steam Pressure <i>PSI</i>	116 - 174		
Condensate Return <i>inch</i>	1 1/2		
Number of Exhaust Connections	1		
Ironer Exhaust Diameter <i>inch</i>	10		
Ironer Exhaust Flow <i>cfm</i>	2,943		
Ironer Exhaust Back Pressure (max) <i>inch wc</i>	4		
Electrical Power (all motors) <i>KVA</i>	37.4		
Available Voltages, Wire Conductor, Amp	Electric Electric		
Compressed Air Connection <i>inch</i>	1/2		
Compressed Air Flow <i>cfm</i>	16		
Compressed Air Pressure <i>PSI</i>	87 - 94		
Net Weight Total <i>lb</i>	33,157	36,862	39,209
Net Weight First Roll <i>lb</i>	11,905	13,118	13,922
Net Weight Second Roll <i>lb</i>	11,177	12,390	13,195
Net Weight Third Roll <i>lb</i>	10,075	11,354	12,092
Crated Weight Total <i>lb</i>	38,911	43,012	45,360
Crated Weight First Roll <i>lb</i>	13,823	15,168	15,972
Crated Weight Second Roll <i>lb</i>	13,095	14,440	15,248
Crated Weight Third Roll <i>lb</i>	11,993	13,404	14,143
Machine Width <i>inch</i>	174.1	186.6	193.7
Machine Depth <i>inch</i>	232.3 - 244.6*		
Machine Height <i>inch</i>	73.2 - 112.2**		
Crated Roll Width <i>inch</i>	181	201	201
Crated Roll Depth <i>inch</i>	88		
Crated Roll Height <i>inch</i>	90.6		

* Depends on small piece tray.

** Depends if handrail is used.

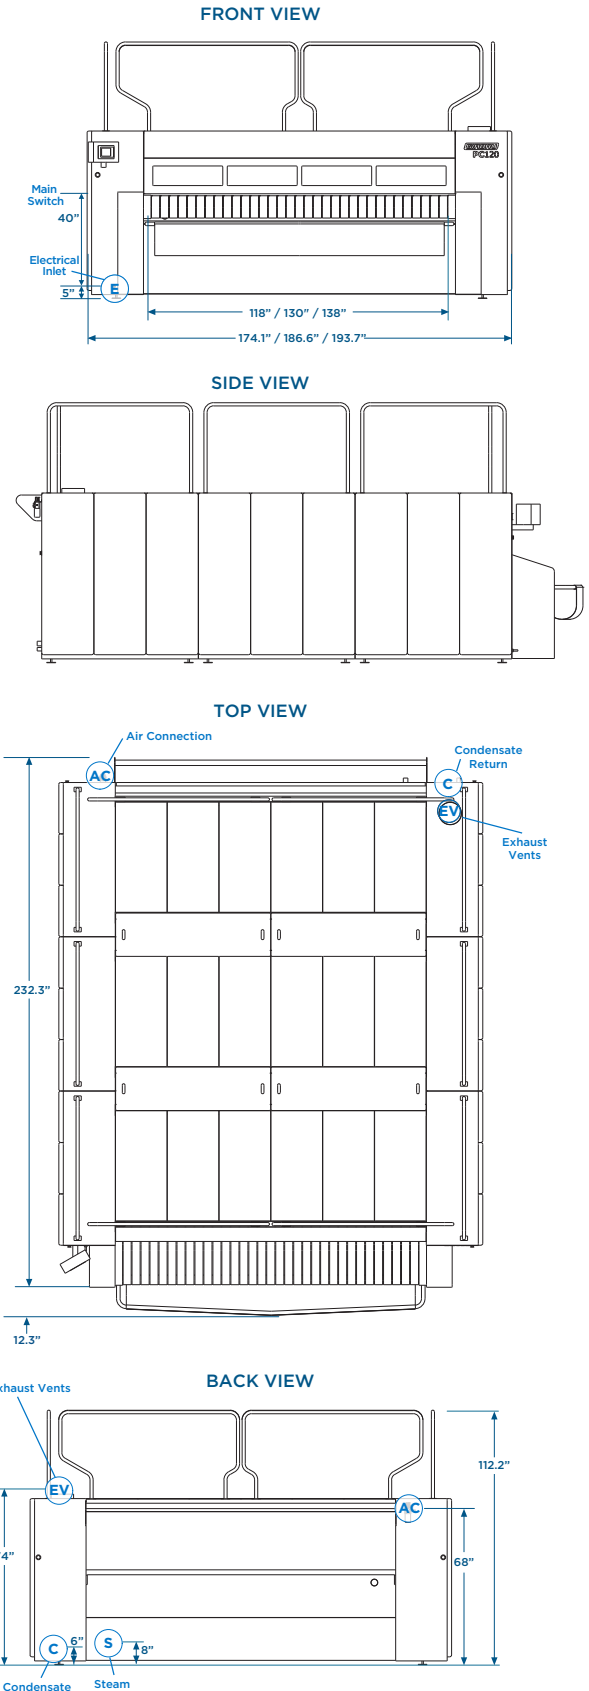

Specifications subject to change without notice or obligation. Contact Girbau Industrial at (800) 256-1073 for dimensions not shown or for clarification.