

CG195-205+


PRODRY2+ DRYING TUMBLER

ARCHITECTURAL/MECHANICAL
PRODUCT SPECIFICATIONS

ProDry2+

Inverter Drive

Capacity <i>lbs</i>	up to 205
Cylinder Diameter <i>inch</i>	50.8
Cylinder Depth <i>inch</i>	50
Cylinder Volume <i>cu ft</i>	58.6
Net Weight <i>lbs</i>	
Gas	1550
Steam	1700
Crated Weight <i>lbs</i>	
Gas	1630
Steam	1780
Machine Width <i>inch</i>	52.9
Machine Depth <i>inch</i>	77.3
Machine Height <i>inch</i>	94
Door Opening <i>inch</i>	27
Floor to Door <i>inch</i>	32.1
Shipping Dimensions <i>inch</i> WxDxH	52.1 x 81.3 x 99
Exhaust Diameter <i>inch</i>	12
Exhaust Air Flow <i>cfm</i>	2150
Exhaust Back Pressure (max) <i>WCI</i>	0.8
Required Makeup Air <i>sq in</i>	525
Gas Connection <i>inch</i>	1 NPT
Gas Heating <i>BTU/h</i>	425,000
Gas Pressure (max/recommended/min)	
Natural Gas <i>wc</i>	10.5 / 6.5 / 5
Propane <i>wc</i>	13 / 11 / 10
Steam Connection <i>inch</i>	3/4 NPT
Condensate Outlet Connection <i>inch</i>	1 NPT
Steam Heating <i>BTU/h</i> at 100 PSI	265,000

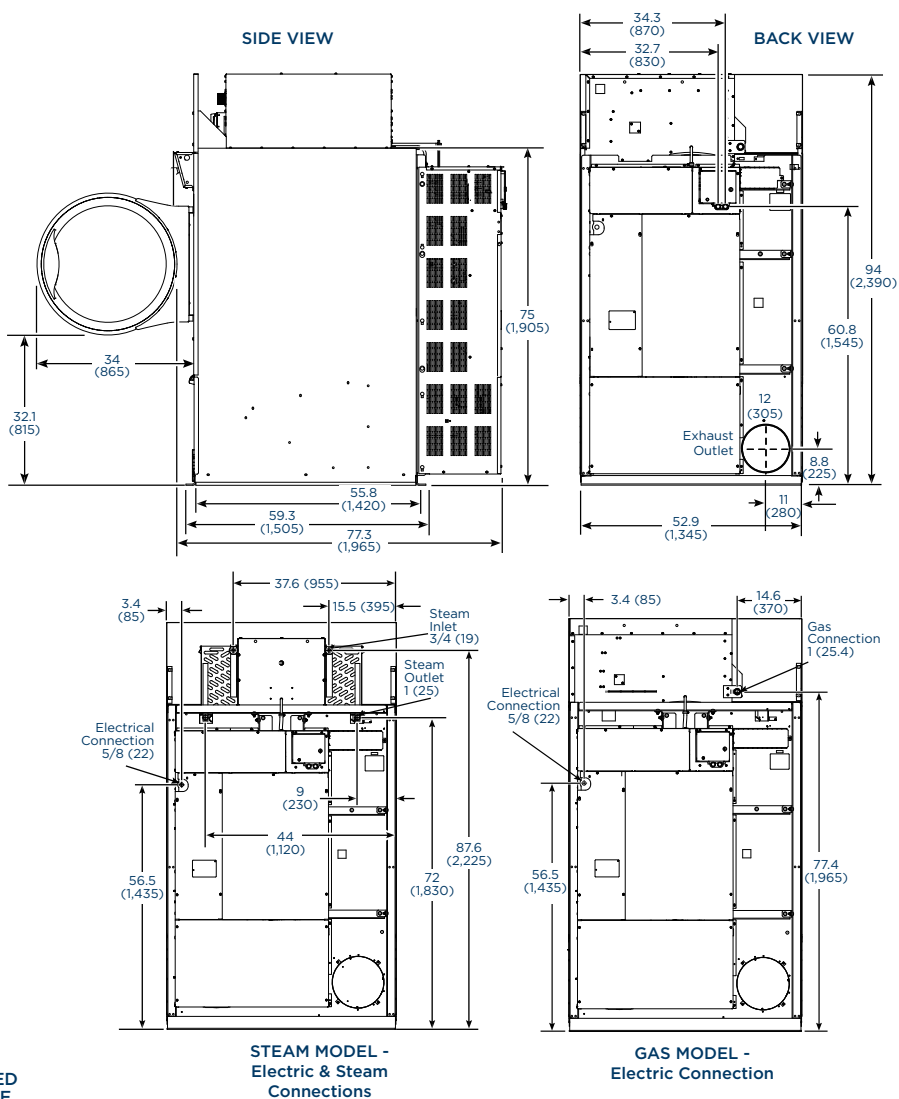

GAS/STEAM MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
200-240/50-60/3	3W+G	12	15
380-415/50-60/3	3W+G	7	15
440-480/50-60/3	3W+G	6	15