


CA075

CONTINENTAL ON-PREMISE DRYING TUMBLER


ARCHITECTURAL/MECHANICAL PRODUCT SPECIFICATIONS

Capacity <i>lbs</i>	75
Cylinder Diameter <i>inch</i>	36.3
Cylinder Depth <i>inch</i>	36
Cylinder Volume <i>cu ft</i>	21.5
Net Weight <i>lbs</i>	721
Crated Weight <i>lbs</i>	773
Machine Width <i>inch</i>	38.2
Machine Depth <i>inch</i>	47.8
Machine Height <i>inch</i>	75.3
Door Opening <i>inch</i>	31.4
Floor to Door <i>inch</i>	25.2
Shipping Dimensions <i>inch</i> WxDxH	41 x 51 x 81
Exhaust Diameter <i>inch</i>	8
Exhaust Air Flow <i>cfm</i>	1,000
Exhaust Back Pressure (max) <i>WC</i>	0.70
Required Makeup Air <i>sq in</i>	175
Electric Heating <i>kW</i>	24-30
Gas Connection <i>inch</i>	3/4 NPT
Gas Heating <i>BTU/h</i>	175,000
Gas Pressure (min/max) Natural Gas <i>wc</i> Propane <i>wc</i>	6 - 12 12 - 13
Steam Connection <i>inch</i>	1
Steam Heating <i>BTU/h</i>	275,000
Air Connection <i>inch</i>	1/8
Reversing	Optional, 3PH ONLY


SIDE VIEW

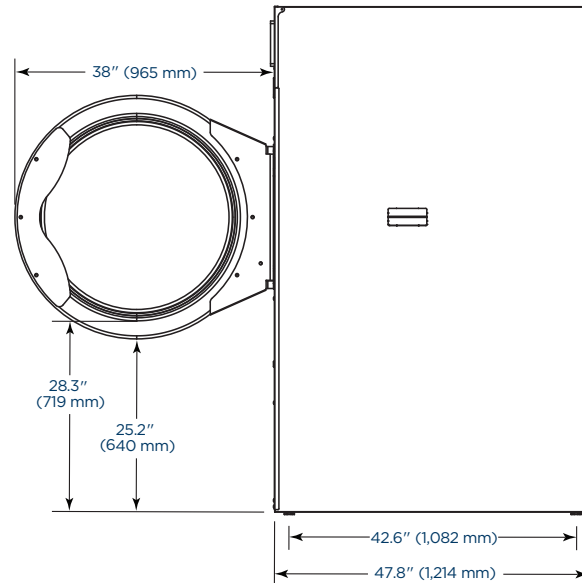

FRONT VIEW

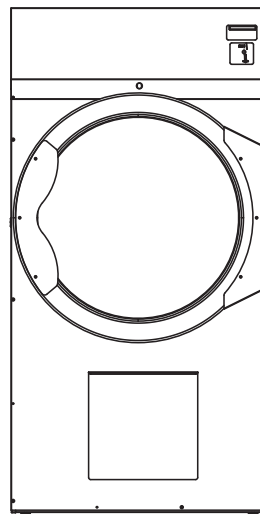

BACK VIEW

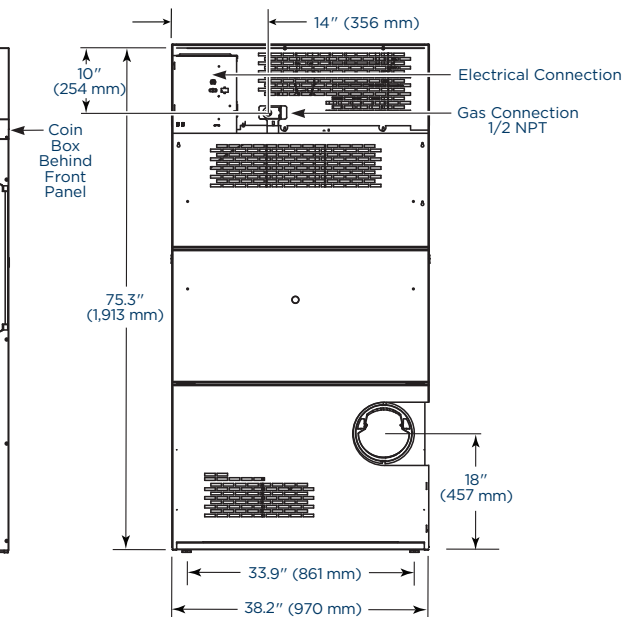

GAS/LP/STEAM MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
120/60/1	1W+N+G	13	20
208-240/60/1	2W+G	7.6	15
208-240/60/3	3W+G	6.7	15
480/60/3	3W+G	3.9	15

ELECTRIC MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
208-240/60/1	3W+G	152	200
208-240/60/3	3W+G	88	90
480/60/3	3W+G	40	60

Specifications subject to change without notice or obligation.
Contact Continental Laundry Solutions at (800) 256-1073 for dimensions not shown or for clarification.