


CA170

CONTINENTAL ON-PREMISE DRYING TUMBLER


ARCHITECTURAL/MECHANICAL PRODUCT SPECIFICATIONS

Capacity <i>lbs</i>	170
Cylinder Diameter <i>inch</i>	51.5
Cylinder Depth <i>inch</i>	42.5
Cylinder Volume <i>cu ft</i>	51.2
Net Weight <i>lbs</i>	2,103
Crated Weight <i>lbs</i>	2,271
Machine Width <i>inch</i>	55.9
Machine Depth <i>inch</i>	63.5
Machine Height <i>inch</i>	100
Door Opening <i>inch</i>	31.3
Floor to Door <i>inch</i>	33.4
Shipping Dimensions <i>inch</i> WxDxH	60 x 68 x 106
Exhaust Diameter <i>inch</i>	18
Exhaust Air Flow <i>cfm</i>	3,700
Exhaust Back Pressure (max) <i>WCI</i>	0.30
Required Makeup Air <i>sq in</i>	550
Electric Heating <i>kW</i>	126
Gas Connection <i>inch</i>	1.5 NPT
Gas Heating <i>BTU/h</i>	550,000
Gas Pressure (min/max) Natural Gas <i>wc</i> Propane <i>wc</i>	6 - 12 12 - 13
Steam Connection <i>inch</i>	1.5
Steam Heating <i>BTU/h</i>	520,000
Air Connection <i>inch</i> Pressure <i>PSI</i>	1/4 80
Reversing	Standard
Water <i>GHT</i> Pressure <i>PSI</i>	3/4 20-60

SIDE VIEW

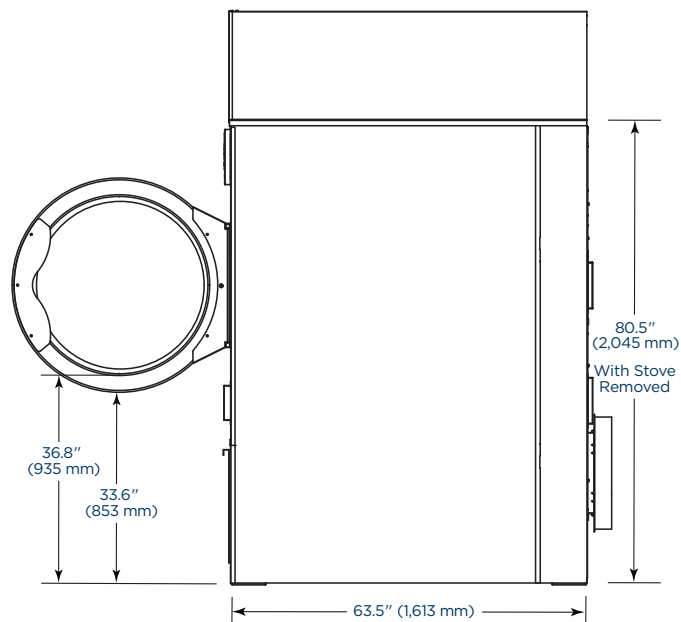

BACK VIEW

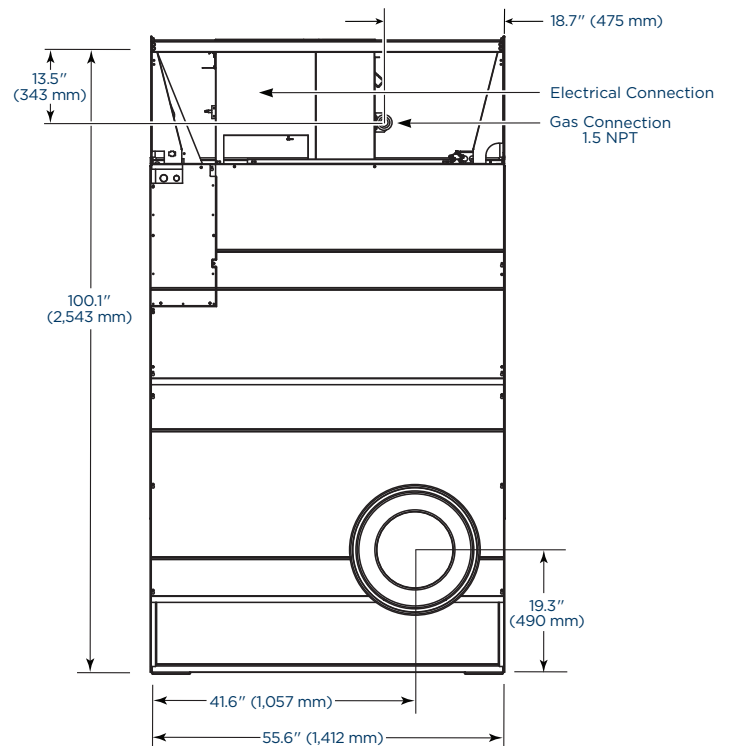

GAS/LP/STEAM MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
208-240/60/3	3W+G	29	40
240/60/3	3W+G	27	40
480/60/3	3W+G	14	20

ELECTRIC MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
240/60/3	3W+G	171	250
480/60/3	3W+G	166	225

Specifications subject to change without notice or obligation.
Contact Continental Laundry Solutions at (800) 256-1073 for
dimensions not shown or for clarification.