

CA30x2




CONTINENTAL ON-PREMISE DRYING TUMBLER

ARCHITECTURAL/MECHANICAL
PRODUCT SPECIFICATIONS

Capacity <i>lbs</i>	30 x 2
Cylinder Diameter <i>inch</i>	30
Cylinder Depth <i>inch</i>	27
Cylinder Volume <i>cu ft</i>	11
Net Weight <i>lbs</i>	520
Crated Weight <i>lbs</i>	548
Machine Width <i>inch</i>	31.5
Machine Depth <i>inch</i>	40.6
Machine Height <i>inch</i>	78.3
Door Openings <i>inch</i>	21.5
Floor to Door <i>inch</i>	49.6 (top)
Shipping Dimensions <i>inch</i> WxDxH	36 x 41 x 84
Exhaust Diameter <i>inch</i>	8
Exhaust Air Flow <i>cfm</i>	450 per pocket
Exhaust Back Pressure (max) <i>WCI</i>	0.60 both pockets
Required Makeup Air <i>sq in</i>	144 both pockets
Gas Connection <i>inch</i>	1/2 NPT
Gas Heating <i>BTU/h</i>	72,000 per pocket
Gas Pressure (min/max)	
Natural Gas <i>wc</i>	6 - 12
Propane <i>wc</i>	12 - 13
Reversing	YES

GAS MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
120/60/1	1W+N+G	14.6	20
208-240/60/1	2W+G	12	15

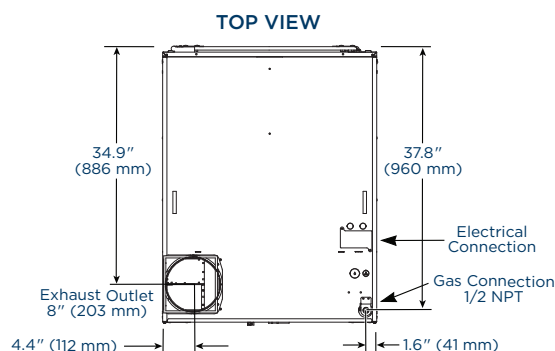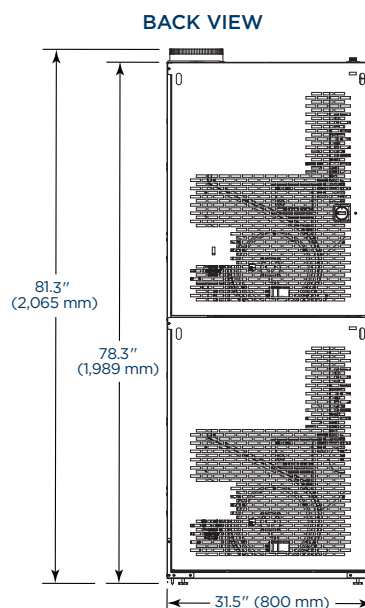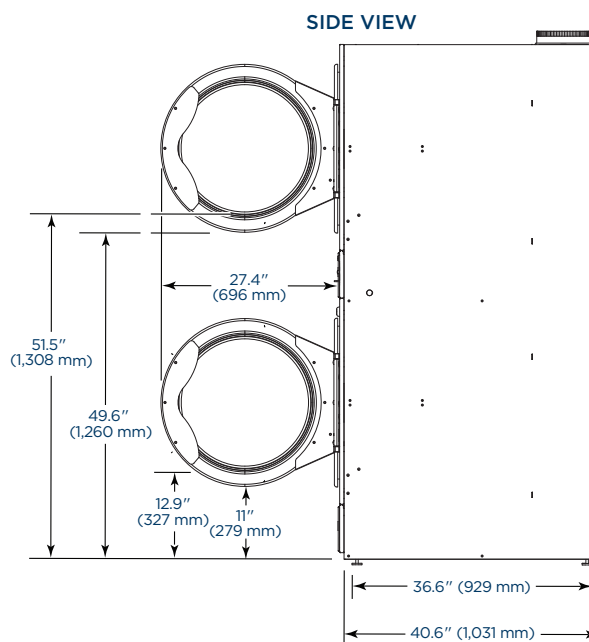

Specifications subject to change without notice or obligation.
Contact Continental Laundry Solutions at (800) 256-1073 for
dimensions not shown or for clarification.