

CA050

ON-PREMISE DRYING TUMBLER

ARCHITECTURAL/MECHANICAL PRODUCT SPECIFICATIONS

Capacity <i>lbs</i>	50
Cylinder Diameter <i>inch</i>	32.8
Cylinder Depth <i>inch</i>	37.5
Cylinder Volume <i>cu ft</i>	18.3
Net Weight <i>lbs</i>	651
Crated Weight <i>lbs</i>	700
Machine Width <i>inch</i>	34
Machine Depth <i>inch</i>	48.8
Machine Height <i>inch</i>	72.1
Door Opening <i>inch</i>	21.5
Floor to Door <i>inch</i>	31.2
Shipping Dimensions <i>inch</i> WxDxH	38 x 51 x 78
Exhaust Diameter <i>inch</i>	8
Exhaust Air Flow <i>cfm</i>	750
Exhaust Back Pressure (max) <i>WCI</i>	0.30
Required Makeup Air <i>sq in</i>	150
Electric Heating <i>kW</i>	20-30
Gas Connection <i>inch</i>	1/2 NPT
Gas Heating <i>BTU/h</i>	150,000
Gas Pressure (min/max) Natural Gas <i>wc</i> Propane <i>wc</i>	6 - 12 12 - 13
Steam Connection <i>inch</i>	1
Steam Heating <i>BTU/h</i>	142,000
Air Connection <i>inch</i>	1/8
Reversing	Optional, 3PH ONLY


GAS/LP/STEAM MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
120/60/1	1W+N+G	12	15
208-240/60/1	2W+G	7.1	15
208-240/60/3	3W+G	5	15
480/60/3	3W+G	3.2	15


ELECTRIC MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
208-240/60/1	3W+G	151	200
208-240/60/3	3W+G	88	125
480/60/3	3W+G	39	50

SIDE VIEW

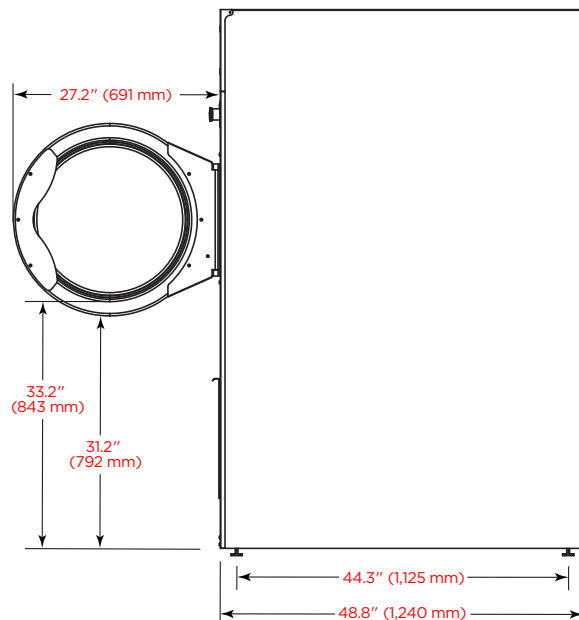

BACK VIEW

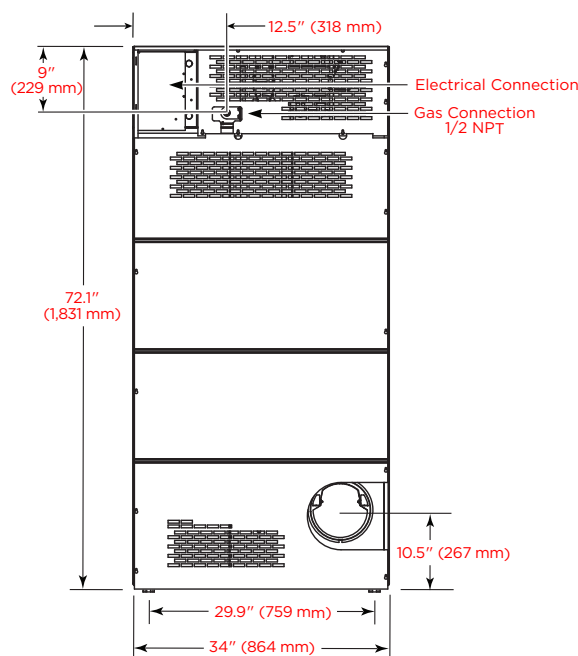

Specifications subject to change without notice or obligation.
Contact Continental Laundry Solutions at (800) 256-1073 for
dimensions not shown or for clarification.