

CA078

ON-PREMISE DRYING TUMBLER

ARCHITECTURAL/MECHANICAL PRODUCT SPECIFICATIONS


Capacity <i>lbs</i>	75
Cylinder Diameter <i>inch</i>	44.5
Cylinder Depth <i>inch</i>	24.9
Cylinder Volume <i>cu ft</i>	22.4
Net Weight <i>lbs</i>	888
Crated Weight <i>lbs</i>	938
Machine Width <i>inch</i>	46.3
Machine Depth <i>inch</i>	34.3
Machine Height <i>inch</i>	84.3
Door Opening <i>inch</i>	31.4
Floor to Door <i>inch</i>	31
Shipping Dimensions <i>inch</i> WxDxH	47 x 38 x 88
Exhaust Diameter <i>inch</i>	10
Exhaust Air Flow <i>cfm</i>	1,200
Exhaust Back Pressure (max) <i>WCI</i>	0.30
Required Makeup Air <i>sq in</i>	204
Electric Heating <i>kW</i>	24-36
Gas Connection <i>inch</i>	3/4 NPT
Gas Heating <i>BTU/h</i>	204,000
Gas Pressure (min/max) Natural Gas <i>wc</i> Propane <i>wc</i>	6 - 12 12 - 13
Air Connection <i>inch</i>	
Reversing	Optional, 3PH ONLY

GAS/LP MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
120/60/1	1W+N+G	13	20
208-240/60/1	2W+G	7.6	15
208-240/60/3	3W+G	6.7	15
480/60/3	3W+G	3.9	15

ELECTRIC MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
208-240/60/1	3W+G	152	200
208-240/60/3	3W+G	107	150
480/60/3	3W+G	40	70

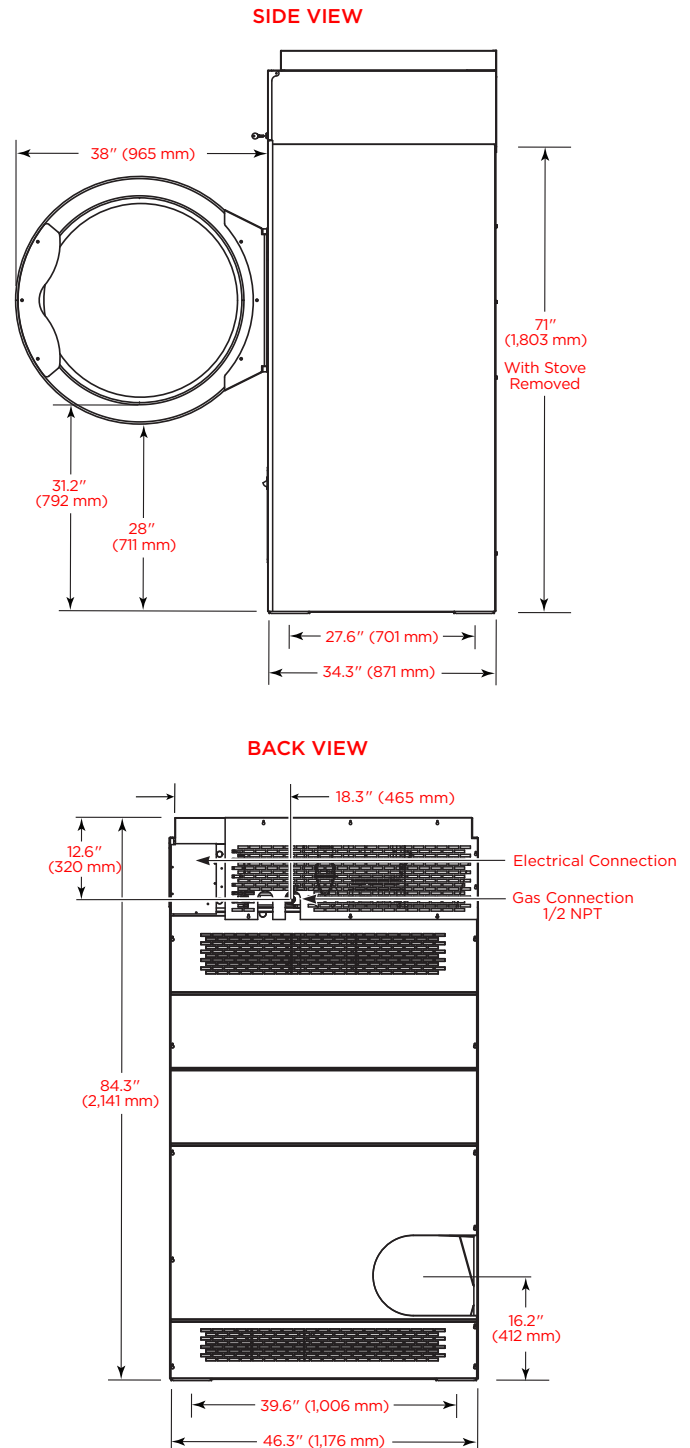

Specifications subject to change without notice or obligation.
Contact Continental Laundry Solutions at (800) 256-1073 for
dimensions not shown or for clarification.