

CA-Series Dryers

High-Performance Stack Drying Tumblers for Vended Laundries

CONTINENTAL

MODELS CA30X2 | CA45X2

Standard Features

- Dual pocket capacity: 30 & 45-lb
- Axial airflow drying efficiency
- Dual micro LED screen
 - Dual configurable coin drop/security box
 - Dual card/alternative payment system ready
- 208-240/60/1 reversing
- Cylinder with ever-bright stainless steel backplate, galvanized walls & lifters
- Oversized steel door frame & hinge with gasket-less tempered glass
- Ergonomic twin door handle with magnetic door close
- White powder coat cabinet
- Single electrical, gas (LP) & vent connections
- Two-point front cylinder roller support with center rear bearing

Optional Features

- Stainless steel cabinet front
- Full stainless steel cylinder
- 120/60/1
- LP conversion kit from natural gas

Efficient Operation




- Axial airflow maximizes drying time & reduces utility energy cost
- Perfectly-balanced heat input & airflow pin points load moisture while evenly drying mixed-item loads
- Oversized doors & ergonomic handles speed loading & unloading, accelerating customer cycles through the process

Serviceability & Diagnostics

- Front hinged control panel for access to main control, diagnostic lights & coin meter
- Removable rear service panels allow access to motors, drive belts, fan & utility connections
- Micro control monitors machine operation & displays self-diagnostic reports of errors & maintenance needs
- Keyed lint drawer with stainless steel micro-mesh filter screen for durability & quick access for cleaning

Complete Control

- Independently powered for upper & lower pocket
- Bright LED display with 3-dry cycle options: High, Medium or Low with cycle pause
- Variable cycle time, temperature & automatic cooldown
- Adjustable for reversing or non-reversing
- Programmable incremental time per vend or full cycle pricing option
- Top-off time & vend option
- Self-diagnostic reporting

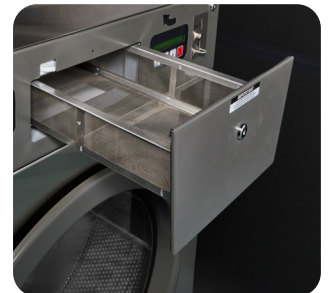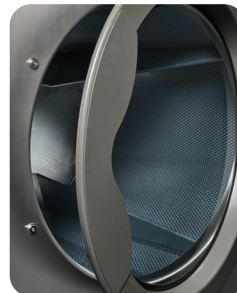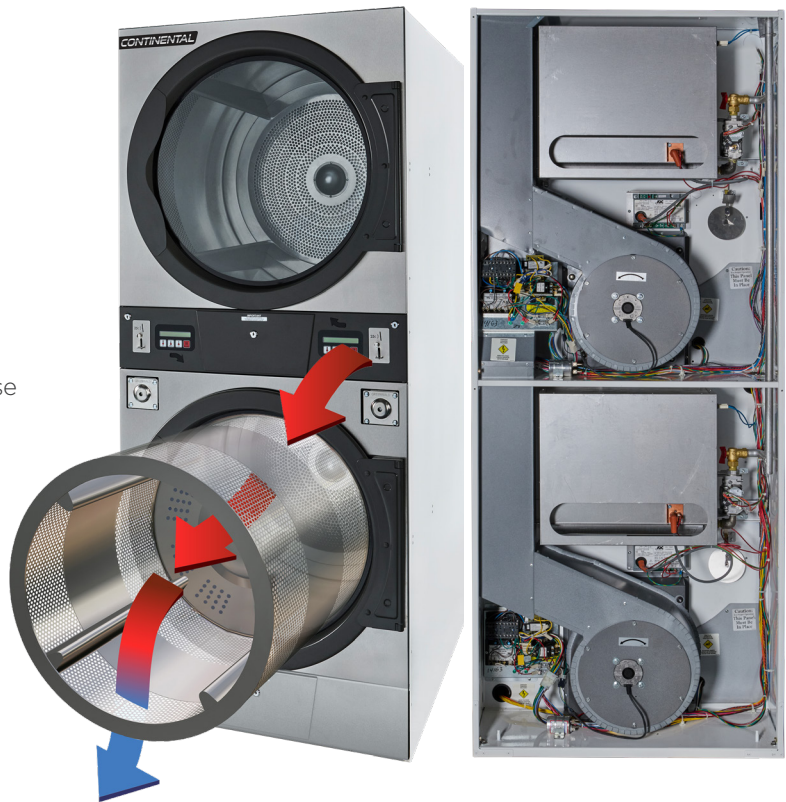

Continental

Continental is a brand of Continental Laundry Solutions, an industry-leading provider of comprehensive laundry equipment and support services for the vended, commercial, industrial and textile care markets. Engineered for commercial and vended laundries, Continental products are designed to integrate seamlessly with partner washer systems, delivering exceptional efficiency, productivity and ease of use.

Backed by an extensive distributor network, Continental Laundry Solutions combines advanced laundry technology with expert support to help customers achieve long-term success. Committed to sustainability, innovation and strategic laundry solutions, we empower laundries to operate smarter, cleaner and more profitably.



Product Specifications	CA30X2	CA45X2
Capacity <i>lbs</i>	30 x 2	45 x 2
Cylinder Diameter <i>inch</i>	30	32.8
Cylinder Depth <i>inch</i>	27	30
Cylinder Volume <i>cu ft</i>	11	14.5
Net Weight <i>lbs</i>	520	639
Crated Weight <i>lbs</i>	548	701
Machine Dimensions <i>inch</i> (WxDXH)	31.5 x 40.6 x 78.3	34.3 x 47.9 x 82.2
Door Openings <i>inch</i>	21.5	27
Floor to Door <i>inch</i>	49.6 (top)	48.2 (top)
Shipping Dimensions <i>inch</i> (WxDXH)	36 x 41 x 84	38 x 49 x 871
Exhaust Diameter <i>inch</i>	8	10
Exhaust Air Flow <i>cfm</i>	450 per pocket	525 per pocket
Exhaust Back Pressure (max) <i>WCI</i>	0.60 both pockets	0.60 both pockets
Required Makeup Air <i>sq in</i>	144 both pockets	188 both pockets
Gas Connection <i>inch</i>	1/2 NPT	1/2 NPT
Gas Heating <i>BTU/h</i>	72,000 per pocket	94,000 per pocket
Gas Pressure (min/max)		
Natural Gas <i>wc</i>	6 - 12	6 - 12
Propane <i>wc</i>	12 - 13	12 - 13
Reversing	Yes	Yes
Available Voltages/Wire Conductor/Amp (Rev Amp)/Recommended Breaker Size		
Gas/LP	120/60/1, 1W+N+G, 14.6, 20 208-240/60/1, 2W+G, 12, 15	120/60/1, 1W+N+G, 15.6, 20 208-240/60/1, 2W+G, 10,15

Specifications subject to change without notice or obligation. Contact Continental Laundry Solutions at (800) 256-1073 for dimensions not shown or for clarification.

* 5-Year Factory Parts Warranty on all components except for belts and lint filter. Post warranty original manufacturer service parts are backed by an exclusive 1-year guarantee. See product warranty bond for complete warranty statement.