


CA115

CONTINENTAL ON-PREMISE DRYING TUMBLER


ARCHITECTURAL/MECHANICAL PRODUCT SPECIFICATIONS

Capacity <i>lbs</i>	115
Cylinder Diameter <i>inch</i>	42
Cylinder Depth <i>inch</i>	41.3
Cylinder Volume <i>cu ft</i>	33.1
Net Weight <i>lbs</i>	1,260
Crated Weight <i>lbs</i>	1,400
Machine Width <i>inch</i>	46.1
Machine Depth <i>inch</i>	63.6
Machine Height <i>inch</i>	84
Door Opening <i>inch</i>	31.4
Floor to Door <i>inch</i>	27.5
Shipping Dimensions <i>inch</i> WxDxH	52 x 68 x 93
Exhaust Diameter <i>inch</i>	14
Exhaust Air Flow <i>cfm</i>	2,100
Exhaust Back Pressure (max) <i>WCI</i>	0.30
Required Makeup Air <i>sq in</i>	343
Electric Heating <i>kW</i>	60-72
Gas Connection <i>inch</i>	1 NPT
Gas Heating <i>BTU/h</i>	343,000
Gas Pressure (min/max) Natural Gas <i>wc</i> Propane <i>wc</i>	6 - 12 12 - 13
Steam Connection <i>inch</i>	1.25
Steam Heating <i>BTU/h</i>	365,000
Air Connection <i>inch</i> Pressure <i>PSI</i>	1/8 80
Reversing	Standard
Water <i>GHT</i> Pressure <i>PSI</i>	3/4 20-60

SIDE VIEW

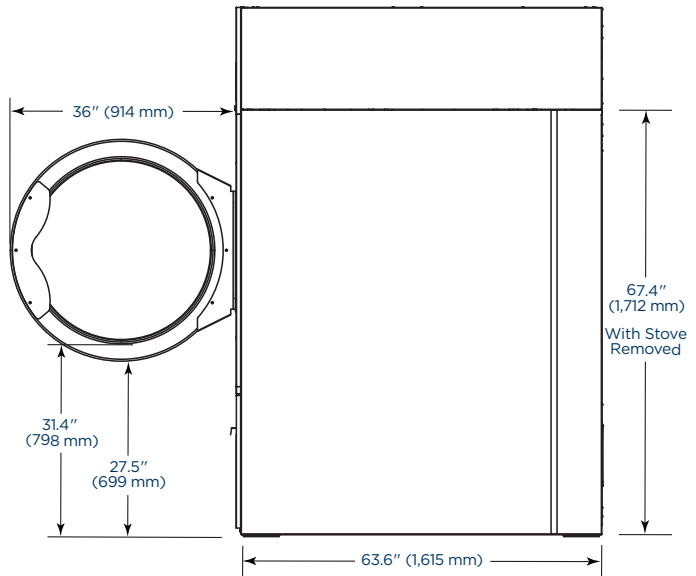

BACK VIEW

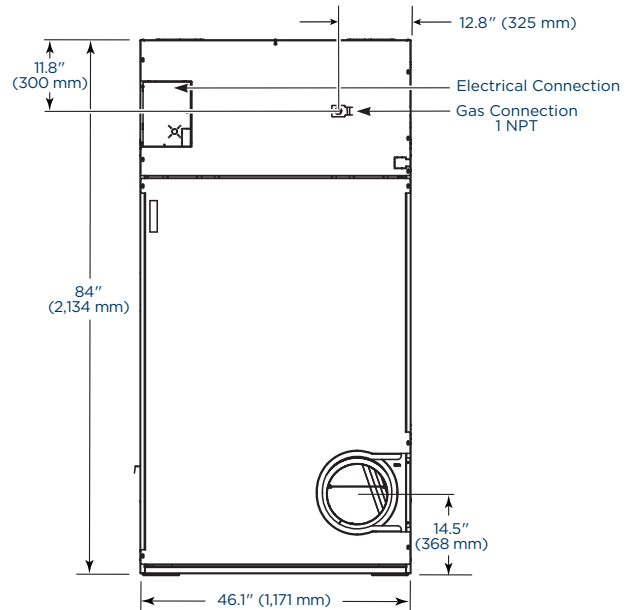

GAS/LP/STEAM MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
208-240/60/3	3W+G	15	20
480/60/3	3W+G	8	15

ELECTRIC MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
208/60/3	3W+G	182	250
240/60/3	3W+G	159	200
480/60/3	3W+G	95	125

Specifications subject to change without notice or obligation.
Contact Continental Laundry Solutions at (800) 256-1073 for dimensions not shown or for clarification.