

CA45x2




CONTINENTAL ON-PREMISE DRYING TUMBLER

ARCHITECTURAL/MECHANICAL
PRODUCT SPECIFICATIONS

Capacity <i>lbs</i>	45 x 2
Cylinder Diameter <i>inch</i>	32.8
Cylinder Depth <i>inch</i>	30
Cylinder Volume <i>cu ft</i>	14.6
Net Weight <i>lbs</i>	639
Crated Weight <i>lbs</i>	701
Machine Width <i>inch</i>	34.3
Machine Depth <i>inch</i>	47.9
Machine Height <i>inch</i>	82.2
Door Openings <i>inch</i>	27
Floor to Door <i>inch</i>	48.2 (top)
Shipping Dimensions <i>inch</i> WxDxH	38 x 49 x 87
Exhaust Diameter <i>inch</i>	10
Exhaust Air Flow <i>cfm</i>	525 per pocket
Exhaust Back Pressure (max) <i>WCI</i>	0.60 both pockets
Required Makeup Air <i>sq in</i>	188 both pockets
Gas Connection <i>inch</i>	1/2 NPT
Gas Heating <i>BTU/h</i>	94,000 per pocket
Gas Pressure (min/max)	
Natural Gas <i>wc</i>	6 - 12
Propane <i>wc</i>	12 - 13
Reversing	YES

GAS MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
120/60/1	1W+N+G	15.6	20
208-240/60/1	2W+G	10	15

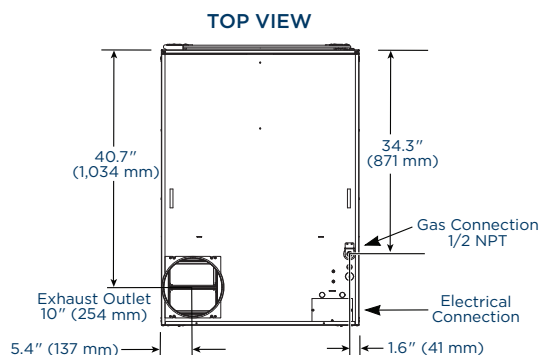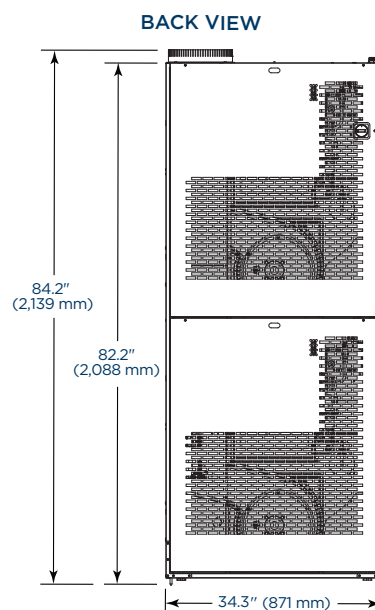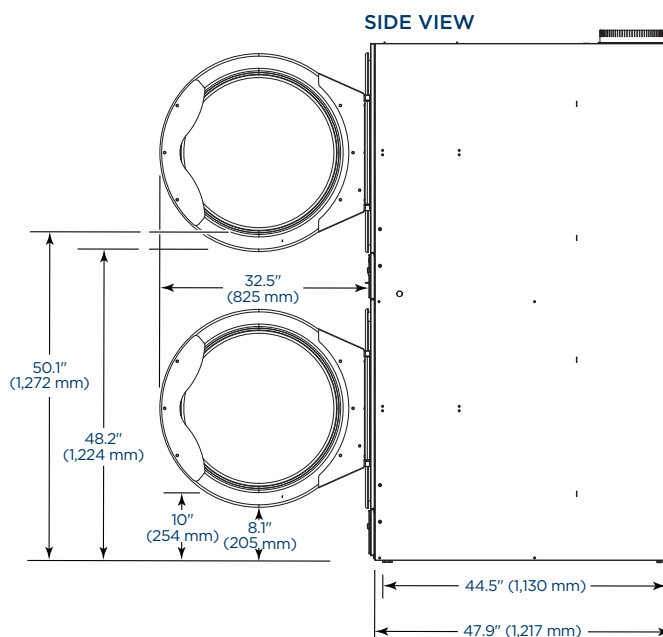

Specifications subject to change without notice or obligation.
Contact Continental Laundry Solutions at (800) 256-1073 for
dimensions not shown or for clarification.